


Instruction

1. Please check, if the content is complete. If necessary, spread the pipe on a clean and even surface.
2. Connect the pipes according to the plan, except the foot-pipes. The foot-pipes are connected with springs and will snap into place at a later stage.
3. Spread the tent-skin besides the framework and then carry it over the framework. Position the roof of the tent-skin in place.
4. Raise one side of the framework with the skin and connect the foot-pipes. Continue with the other side. **Be careful, not to stress single poles.** **Multiple people carrying the skin are very useful.**
5. Close all zippers and entrances. So the tent-skin surrounds the framework completely.
6. Then fix the 4 corners with tent pegs to the ground. Pay attention, that the seam in the corner, runs along the pipe. Once properly adjusted continue with tent-pegs, starting at the next seam. If necessary, fix the storm-lines to the upper parts of the tent.

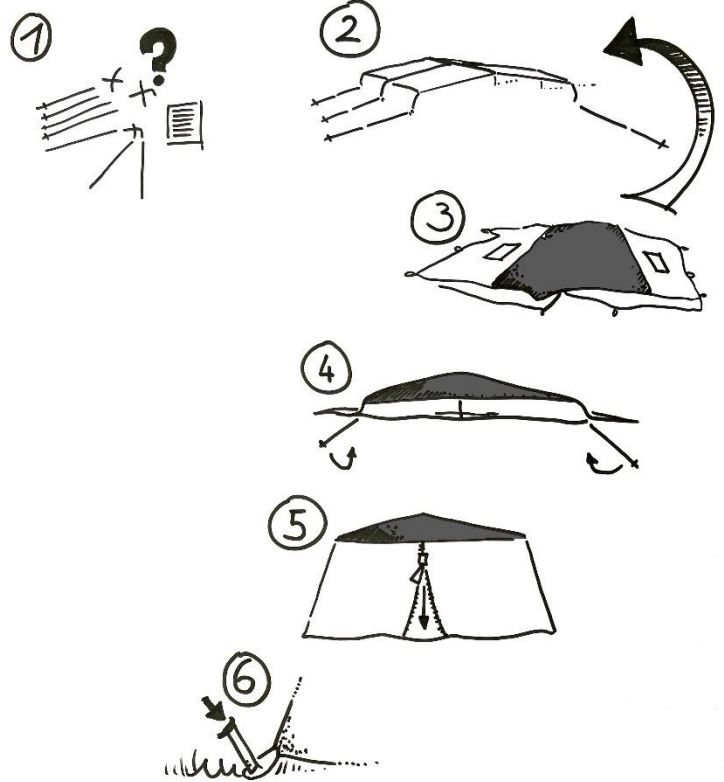

Please inspect alle tension lines and tent-pegs frequently and adjust, if necessary. For safety you may mark tension lines and long tent-pegs with colorful tape.

Scope of supply:

- Tent-Skin
- Framework
- Tension lines, Tent-pegs

